

Iligero

EC10




手電筒說明書

感谢您購買我們的產品！
www.iligero.com

產品特點

1. 簡潔輕便，便於日常攜帶，特別適用於戶外探險，徒步及搜索等活動
2. 三種調光，最高亮度1100流明，最遠射程155米
3. 使用1顆P8燈珠
4. 使用一節18650鋰離子電池
5. 內置Type-C充電接口
6. 電量顯示，隨時了解電池電量
7. 尾部調光按鈕，一鍵調光換檔
8. 防滑筒身設計，可倒立
9. 恆流電路，續航最長可達26小時
10. 尺寸：25.42mm(筒頭直徑)*23.56mm(筒身直徑)*134.5mm(筒長)
11. 重量：79.5g(不含電池)，126g(含電池)

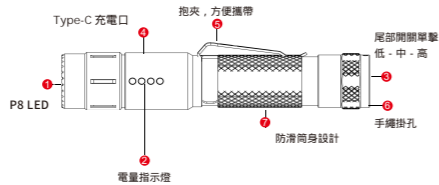

流明與續航

FL1 STANDARD	高亮檔	中亮檔	低亮檔	SOS檔	爆閃模式
亮度	1100流明	280流明	25流明	300流明	850流明
續航時間	2.5小時	3小時 10分	26小時	/	/
射程	155米				
最大光強	5560坎德拉				
防跌落高度	1米				
防水等級	IPX4				

注：以上資料是使用1顆18650 2000mAh鋰離子電池在實驗室環境下測試得出。資料可能與不同品牌的電池或使用環境的變化而有所不同。高亮檔顯示時是累計續航。

操作說明

開機/關機

按一下尾按開關點亮手電筒，再次按下關閉手電筒。

模式切換

開機狀態下，單擊尾部開關，檔位按低亮檔→中亮檔→高亮檔 低亮檔的順序調節亮度。

特殊模式(爆閃/SOS)

爆閃模式：在開機狀態下，輕觸尾部開關2次進入爆閃模式；再次輕觸返回原來的檔位。

SOS模式：在爆閃狀態下，輕觸尾部開關2次進入SOS模式；再次輕觸返回原來的檔位。

記憶功能

手電筒具有記憶檔功能，關閉前是什麼檔位，再次開啟時能與上次關機時保持相同檔位。

低電提示

當電筒工作到電池電壓下降至3V時，指示燈亮一個且閃爍，直到關機。

智能溫控

手電筒長時間以高亮度檔位工作時會積累大量熱量，為有效延長LED使用壽命及避免外殼溫度過高影響使用舒適度，當電路檢測到溫度超過60°C時，手電筒會自動逐漸降低亮度。

電池選用

電池類型	尺寸規格	標稱電壓	推薦
IG18-35	18650	3.6V	推薦
可充電離子電池	18650	3.6V	是

電池更換

擰開筒尾裝入電池，注意將電池的正極方向對準燈頭，擰緊筒尾即可進入待機狀態。

充電說明

1. 關閉手電筒，掀開手電筒身的防塵帽，插上USB Type-C充電線；
2. 充電時綠色指示燈閃爍，充滿後4顆綠燈常亮；
3. 充電完成後，請蓋緊防塵帽，即可正常使用手電筒。

電量顯示

筒身有4顆LED顯示燈，開機後指示燈顯示當前電量，顯示5秒後關閉

- 4 LED -剩餘電池電量超過 75%
- 3 LED -剩餘電池電量 50%
- 2 LED -剩餘電池電量 25%
- 1 LED -剩餘電池電量少於 10% 需及時充電

使用與維護

1. 由於電池會緩慢地自放電，長時間不使用手電筒時，建議每四個月充電一次以延長電池壽命。

2. 請勿拆卸燈具密封部件，否則將會導致保修失效並可能損壞燈具。

3. 長期不使用時請將電池從燈具中取出，否則可能因部分品質不良的電池洩漏造成燈具損壞。

4. 請經常清潔燈具或電池的導電接觸面以保證燈具的正常工作特別是當燈具出現異常的閃爍或者無法點亮時。請先檢查電池電量，再使用酒精棉簽清潔導電接觸面或接觸點。

包裝清單

EC10手電筒、鋰離子電池、Type-C充電線、抱夾、手繩、備用防水圈x1、說明書

注意事項

1. 此此燈具光線明亮，直接照射眼睛可能會導致暫時或長期失明。請勿將本燈具直接照射眼睛！
2. 如果操作不當，鋰電池可能會洩漏、爆炸造成傷害。請勿拆卸或與其他類型的電池混合使用，請勿將電池暴露在水高溫或火中。
3. 此燈具長時間使用可能會變熱。操作時請小心，以防燙傷。
4. 請勿在易燃材料周圍或爆炸性環境中操作。
5. 請勿將本品放置於兒童接觸不到的地方。

保修條款

1. ILIGERO產品自售出之日起7日內，在正常使用情況下，出現產品品質問題，用戶可選擇更換新品或修理服務，如同型號同規格的產品停止生產，可更換不低於原產品性能的同品牌產品。
2. ILIGERO產品自售出之日起1年內，在正常使用情況下，出現產品品質問題，享受免費維修服務。買家將負責商品的運輸。超過12個月，買家將負責產生的零件和運輸費用。Iligero將使用合理的運輸方式寄貨。

下面情況不在保修範圍

1. 損壞、拆卸、毀壞和未經授權的改裝。
2. 因儲存不當或電池洩漏造成的損壞。

售後

1. 請聯繫經銷商處理或發送郵件至 in fo@iligero.com聯繫我們。



87mm

Iligero

EC10




Operation Manual

Thank you for purchasing our products
www.iligero.com

Features

1. Compact and easy for daily carry. Specially designed for outdoor explore, hiking and search & rescue.
2. Three brightness levels, max output of 1100 lumen, and a throw distance up to 155 meters.
3. Uses one high-performance LED.
4. Powered by one 18650 lithium-ion battery (included).
5. USB-C charge port integrated into body of flashlight for quick, convenient charging.
6. Power Indicator, know battery level at anytime
7. Output selection with tail switch.
8. Anti-skidding pattern to enhance grip and ergonomic feel, capable of tail standing.
9. Digitally regulated circuit; max runtime of 26 hours.
10. Size: 25.42mm*23.56mm*134.5mm
11. Weight: 79.5 grams (without battery); 126grams (with battery)

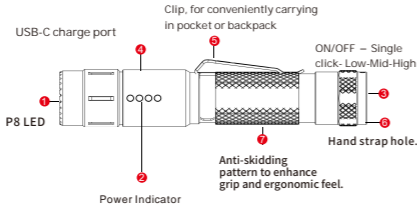

Output & Runtime

FL1 STANDARD	High	Middle	Low	SOS	Strobe
亮度	1100 LUMENS	280 LUMENS	25 LUMENS	300 LUMENS	850 LUMENS
續航時間	2.5h	3h10mins	26h	/	/
射程	155 meters				
最大光強	5560cd (Max Intensity)				
防跌落高度	1 (Impact Resistant)				
防水等級	IPX4 (Waterproof)				

Note: Stated data has been measured by using one 18650 3.6V 2000mAh in the laboratory. The data may vary due to different battery and different environment conditions. *The High output is measured in total of runtime.

Operating Instruction

ON/OFF

Fully press the tail switch to turn on the light, press once again to turn of fthe light.

Output Selection

With the light turned on, single click the tail switch to change the brightness mode,cycling by Low-Middle-High.

Special Mode (Strobe/SOS)

Strobe : With the light turned on, half-press the tail switch twice to enter the strobe mode. It will return to the last output when half-press the tail switch again.

SOS: With the strobe mode turned on, half-press the tail switch twice to enter SOS mode, half-press the switch again to return to the previous status.

Memory function

The flashlight has a memory function. It will access the last used output setting when turning the light off and back on again.

Low-voltage Warning System

When the battery voltage is lower than 3V, the indicator light will light up and flash until the device shuts down.

Intelligent Overheat Protection

The flashlight will become hot with extended use. When the light reaches a temperature of 60 ° C/140 ° F or above, the light will automatically adjust the brightness level to allowlevel to prolong the lifespan of LED.

Recommended batteries

Type	Dimensions	Nominal Voltage	Usability
IG18-35	18650	3.6V	Recommended
Rechargeable Battery (Li-Ion)	18650	3.6V	Usable

Battery Replacement

Insert the batteries with the positive (+) end pointing forward, otherwise the light doesn't work.

Charging

1. Turn off the flashlight, open the dust cap on the flashlight, and plug in the USB Type-C charging cable.
2. The green indicator light will flash when charging, and the four green lights will stay on when fully charged.
3. Once charging is completed, close the dust cover tightly.

Power Indicator

When the light is on, 4 green indicating LEDs on the head will illuminate to indicate the current battery level. The LEDs will remain lit for 5 seconds before turning off. The LEDs indicate the battery level as follows:

- 4 LEDs - More than 75% Battery Power remaining
- 3 LEDs - 50% Battery Power Remaining
- 2 LEDs - 25 % Battery Power Remaining
- 1 LED - Less than 10% Battery Power Remaining and needs recharging.

Storage and Maintenance

1. Recharge a stored light every four months to maintain optimal battery performance.
2. Disassembling the sealed head can cause damage to the lamp and will void the warranty.
3. Remove the battery if light will not be used for anextended period.
4. Periodic cleaning of the battery contacts improves the lamp's performance as dirty contacts may cause the lamp to flickershine intermittently or even fail to illuminate, please check the battery power first, and clean the contact points with a cotton swab soaked in rubbing alcohol.

IN THE BOX

Iligero EC10 flashlight, 2000mAh Li-Ion battery , Clip, USB-C Charging Cable, Lanyard, Spare O-ring, User manual

Caution

1. This flashlight produces extremely bright light which can cause temporary or prolonged blindness. Never shine light into the eyes of non-adversarial parties.
2. Lithium batteries can leak, explode, and/or cause injury if improperly handled. Do not disassemble, short, recharge, mix with other battery types, or expose batteries to water, high temperatures, or fire.
3. This flashlight may become hot with extended use. Exercise caution when handling to prevent burns.
4. Do not operate around flammable materials or in explosive environments.
5. Keep away from children.

Warranty

1. Iligero will replace identical or equal products with documented manufacturing within 7 days of purchase.
2. Iligero offers a 12 month (1 year) free warranty service from date of purchase. Buyer will be responsible for shipping of the item. Over 12 months, buyer is responsible for incurred parts and shipping costs. Iligero will return using a reasonable shipping method.

Unwarrantable

1. Damage, disassembly, destruction and unauthorized modifications.
2. Damage due to improper storage or battery leakage.

Service

1. Contact your retailer or email us at info@iligero.com.



www.iligero.com MADE IN PRC