



E18R V2.0

Ultra-compact High-performance EDC Flashlight



PINT-SIZED LIGHT GUIDES THROUGH ALL NIGHT

1200 lumens maximum output



1200
lumens



1 lumen



Dual lockout
function



Ultra-
compact



USB Type-C
charging



1200 LUMENS CONQUERS EVERY DARK ROAD



The E18R V2.0 is capable of producing 1200 lumens with a beam distance of 146 meters. The light is optimized for illuminating every dark bumpy mountain road or backstreet you travel, as well as any unlit staircases and dim attic spaces you come upon.



146
meters beam



1-LUMEN MOONLIGHT MODE



The 1 lumen mode is useful if you are in pitch-black darkness. Super soft as to be non-glaring, but illuminates enough without affecting those around you.





ELECTRONIC AND PHYSICAL LOCKOUT



The user can lock the light using one of the two available methods, preventing accidental activation during storage or while on the move.



Electronic lock ①
double click to lock/unlock



Physical lock ②
place the pocket clip above
the switch



LIGHTWEIGHT GO-ANYWHERE EDC



This EDC flashlight weighs only 56 grams, easy for long-term hand-held use and is also convenient for backpack or keychain carry. It is perfect for ready-to-go illumination every day.



USB TYPE-C CHARGING



The light comes with a USB Type-C charging port for easy charging. Compatible with most mobile phone charging cables, no need for an additional one when you are outdoors.



Forward and
reverse
plugging-in



Battery level
indicator



200-HOUR ILLUMINATION WITH ONE CHARGE



The included Fenix ARB-L16-700P battery powers the light with an ultra-long runtime, running for up to 200 hours on moonlight mode.

Battery capacity: **700 mAh**


Charging time: **1 h 20 min**

Runtime: **200 h**/Moonlight mode

* 1-lumen Moonlight mode can be continuously used for 200 hours. Test results were produced by Fenix through its laboratory testing.








 Magnetic base

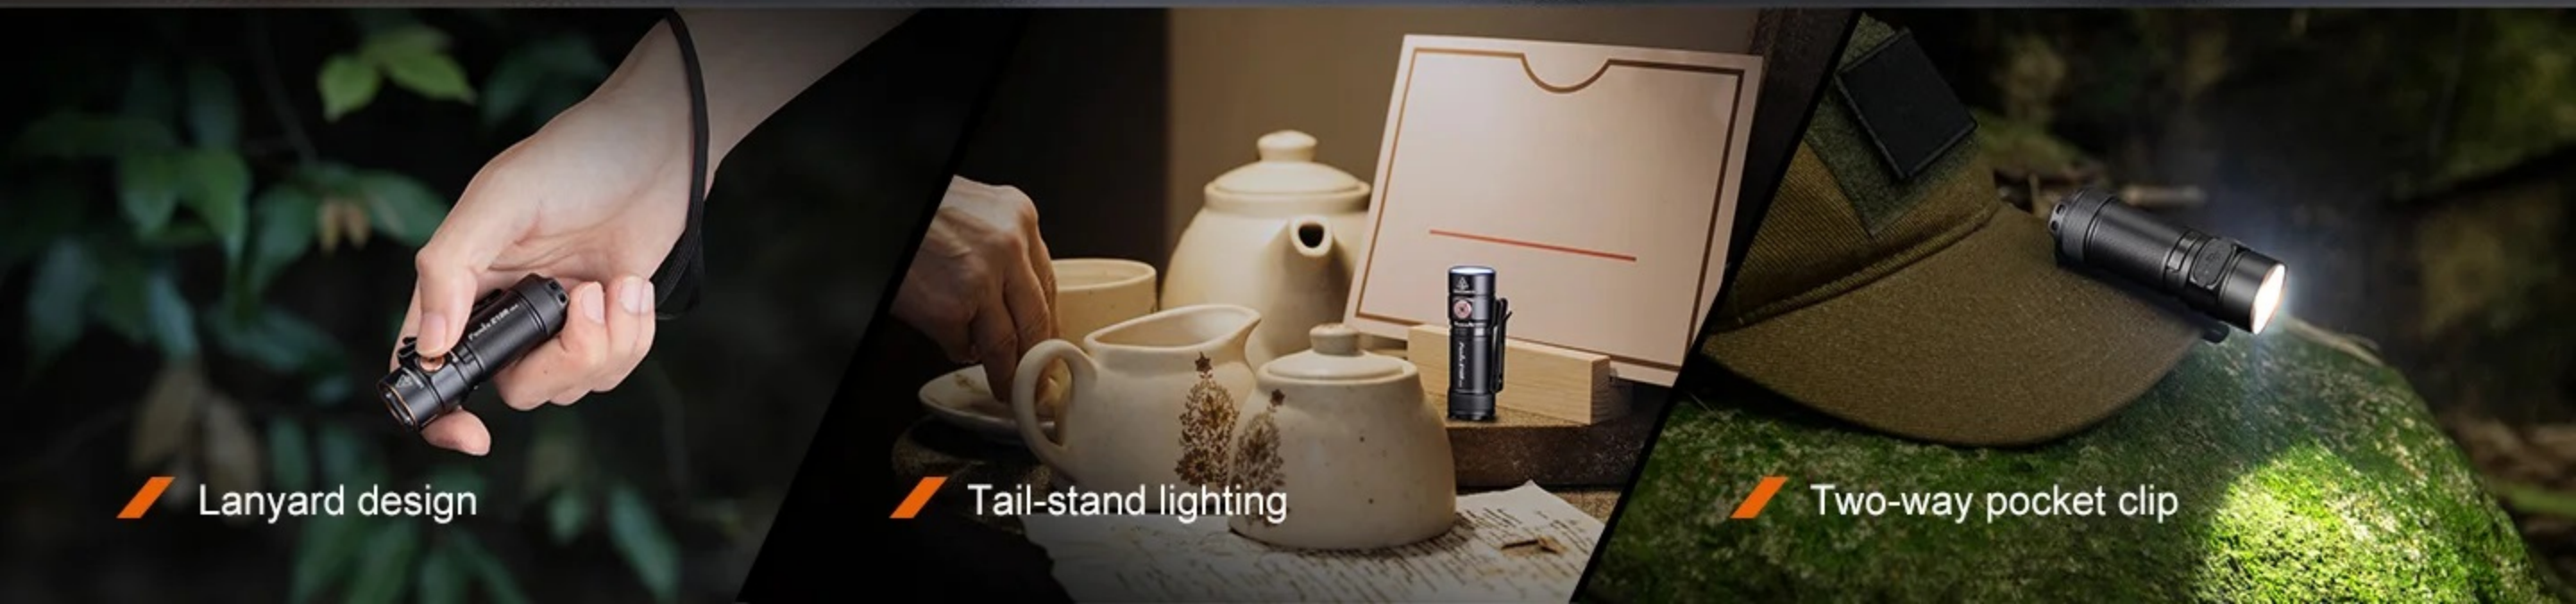


LIGHT WHERE AND WHEN YOU NEED IT



 Lanyard design

 Tail-stand lighting

 Two-way pocket clip

INTELLIGENT OVERHEAT PROTECTION (IOP)



The E18R V2.0 has the innovative Fenix IOP - which protects against high surface temperatures.

IOP ensures that the surface temperature does not exceed 60°C to prevent the risk of burns.



REMAINS TOUGH WITH ROUGH USE



1.5-meter drop tested.




A6061-T6 aluminum body.
High-strength and impact-resistant.



HAIII hard-anodized anti-abrasive finish.
Wear-resistant and corrosion-resistant.

* The 1.5 meters drop test results were produced by Fenix through its laboratory testing. (According to the ANSI/PLATO FL1 standard, 1 meter is stated.)

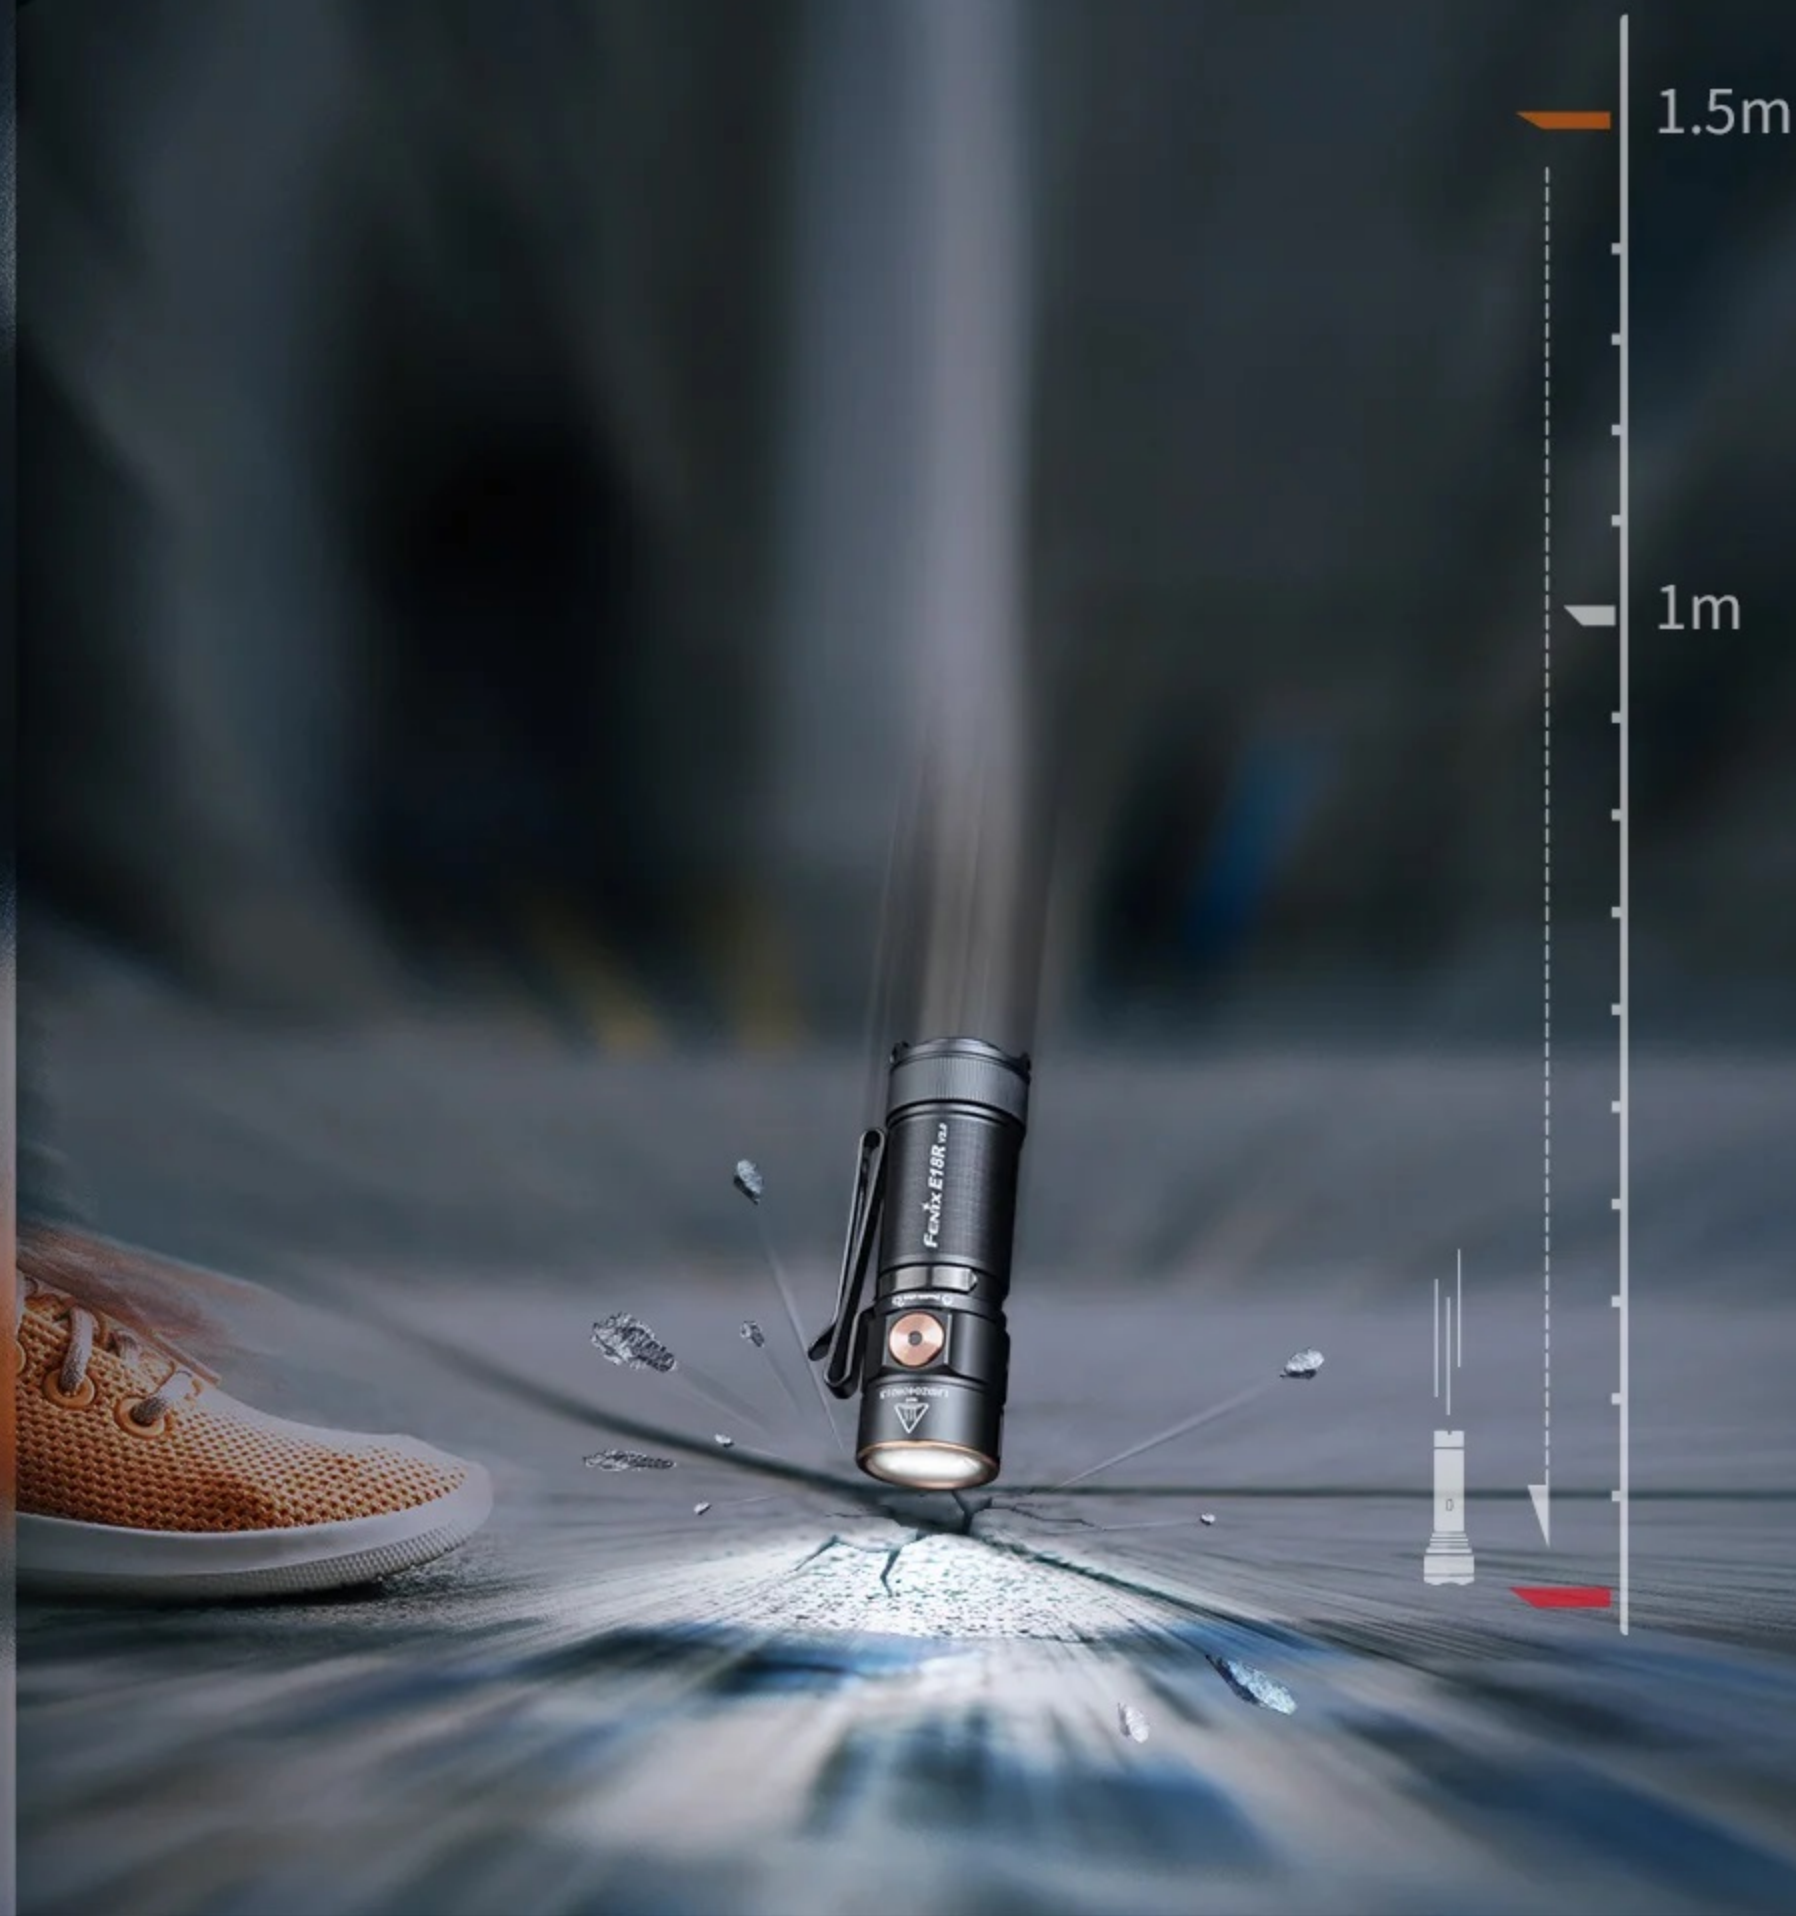

IP68 RATED PROTECTION



Able to function in extreme environments.
Fully protected against dust, water, and foreign objects as rated.

* Rated for "2 meters underwater for 4 hours". According to the ANSI/PLATO FL1 standard, the above specifications are from the results produced by Fenix through its laboratory testing.



TECHNICAL PARAMETERS

Size 2.64" x 0.87" x 0.87" / 67 x 22 x 22 mm.

Weight 1.98 oz / 56 grams (including battery).

ANSI/PLATO FL1	Turbo	High	Med	Low	Moonlight	Strobe
 Output	1200 lumens	350 lumens	150 lumens	30 lumens	1 lumen	1200 lumens
 Runtime	1 hour*	2 hours	3 hours 20 minutes	17 hours	228 hours	/
 Distance	146 meters	81 meters	53 meters	23 meters	9 meters	/
 Intensity	5397 candela	1661 candela	714 candela	137 candela	4 candela	/
 Impact Resistance	1 meter					
 Submersible	IP68					

Note: According to the ANSI/PLATO FL1 standard, the above specifications are from the results produced by Fenix through its laboratory testing using one Fenix ARB-L16-800P rechargeable battery under the temperature of 21±3°C and humidity of 50% - 80%. The true performance of this product may vary according to different working environments and the actual battery used.

*The Turbo/High output are measured in a total of runtime including output at reduced levels due to temperature or protection mechanism in the design.

✓ INCLUDED



Fenix E18R V2.0 flashlight



Fenix ARB-L16-700P rechargeable battery



USB Type-C charging cable



Lanyard



Spare O-ring



User Manual



Warranty card

Package size 113 x 81 x 28 mm

* The data is from the results produced by Fenix through its laboratory testing. Actual results may vary slightly according to the measurement method in the industry.