

iligero

EC22




手電筒說明書

感謝您購買我們的產品！
www.iligero.com

產品特點

- 緊湊設計，方便日常攜帶，特別適用於戶外探險，徒步及應急等活動
- 三檔調光，最高亮度2200流明，最遠射程220米
- 使用1顆SST40 燈珠
- 使用一節18650鋰離子電池
- 內置Type-C充電接口
- 側面調光按鈕，一鍵調光換檔
- 鎖鍵/解鎖功能，防誤按點亮
- 防滑筒身設計
- 磁吸筒尾，適應多場景需求
- 恒流電路，續航最長可達100小時
- 尺寸：29.48mm(筒頭直徑)*25.40mm(筒身直徑)*115.1mm(筒長)
- 重量：76g(不含電池), 126.8g(含電池)

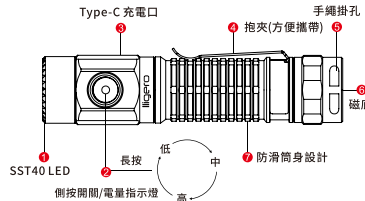

流明與續航

FL1 STANDARD	高亮檔	中亮檔	低亮檔	SOS檔	爆閃模式
☀️ 亮度	2200流明	220流明	5流明	800流明	1700流明
🕒 續航時間	6小時	12小時	100小時	/	/
📏 射程	220米				
⚡ 最大光強	11600坎德拉				
🛡️ 防跌落高度	1米				
🌊 防水等級	IPX8				

注：以上資料是使用1顆iligero IG18-35鋰離子電池在實驗室環境下測試得出，資料可能會因不同品牌的電池或使用環境的變化而有所不同。
* 高亮檔續航時間是累計總數。

操作說明

開機/關機

按一下側按開關點亮手電筒，再次按下關閉手電筒。

模式切換

開機狀態下，長按側按開關，檔位按低亮檔→中亮檔→高亮檔→低亮檔的順序調節亮度。

特殊模式(爆閃/SOS)

爆閃模式：在任意狀態下，按兩下側按開關進入爆閃模式；再次按一下返回原來模式。

SOS模式：在爆閃狀態下，按兩下側按開關進入SOS模式；再次按一下返回原來檔位。

記憶功能

手電筒具有記憶檔功能，關閉前是什麼檔位，再次開啟時能與上次開機時保持相同檔位。

鎖定/解鎖

鎖定：

在開機狀態下，按側按開關三次，白光閃爍一次進入鎖機狀態。

解鎖：

在鎖機狀態下，按側按開關三次，白光閃爍一次即可解鎖。

智能溫控

手電筒長時間以高亮度檔位工作時會積累大量熱量，為有效延長LED使用壽命及避免外殼溫度過高影響使用舒適度，當電路檢測到溫度超過60°C時，手電筒會自動逐漸降低亮度。

電池選用

電池類型	尺寸規格	標稱電壓	是否使用
IG18-35	18650	3.6V	推薦
可充鋰離子電池	18650	3.6V	是

電池更換

擰開筒尾裝入電池，注意將電池的正極方向對準燈頭，擰緊筒尾即可進入待機狀態。

充電說明

- 關閉手電筒，掀開手電筒的防塵帽，插上USB Type-C充電線；
- 充電時指示燈將會以紅色亮起，充滿後綠燈常亮；
- 充電完成後，請蓋緊防塵帽，即可正常使用手電筒。

電量顯示

電池電量不足時，紅燈亮，充滿電後綠燈亮起。

使用與維護

- 由於電池會緩慢地自放電，長時間不使用手電筒時，建議每四個月充電一次以延長電池壽命。
- 請勿拆卸燈具密封部件，否則將會導致保修失效並可能損壞燈具。
- 長期不使用時請將電池從燈具中取出，否則可能因部分品質不良的電池漏液造成燈具損壞。
- 請經常清潔燈具或電池的導電接觸面以保證燈具的正常工作，特別是當燈具出現異常的閃爍或者無法點亮時。請先檢查電池電量，再使用酒精棉簽清潔導電接觸面或接觸點。

包裝清單

EC22手電筒、IG18-35鋰離子電池、電筒套、Type-C 充電線、抱夾、手繩、備用防水圈x1、說明書

注意事項

- 此燈具光線明亮，直接照射眼睛可能會導致暫時或長期失明。請勿將本燈具直接照射眼睛！
- 如果操作不當，鋰電池可能會洩漏、爆炸造成傷害。請勿拆卸或與其他類型的電池混合使用，請勿將電池暴露在水、高溫或火中。
- 此燈具長時間使用可能會變熱。操作時請小心，以防燙傷。
- 請勿在易燃材料周圍或爆炸性環境中操作。
- 請將本品放置於兒童接觸不到的地方。

保修條款

- ILIGERO產品自售出之日起7日內，在正常使用情況下，出現產品品質問題，用戶可選擇更換新品或修理服務，如同型號同規格的产品停止生產，可更換不低於原產品性能的同品牌產品。
- ILIGERO產品自售出之日起1年內，在正常使用情況下，出現產品品質問題，享受免費維修服務。買家將負責商品的運輸。超過12個月，買家將負責產生的零件和運輸費用。iligero將使用合理的運輸方式寄貨。

下面情況不在保修範圍

- 損壞、拆卸、毀壞和未經授權的改裝。
- 因儲存不當或電池洩漏造成的損壞。


售后

請聯繫經銷商處理或發送郵件至info@iligero.com聯繫我們。



iligero

EC22




Operation Manual

Thank you for choosing our products!
www.iligero.com

Features

- Compact and easy for daily carry. Specially designed for outdoor explore, hiking and emergency use.
- Three brightness levels, max output of 2200 lumen, and a throw distance up to 220 meters.
- Uses one high-performance LED.
- Powered by one 18650 lithium-ion battery (included).
- USB-C charge port integrated into body of flashlight for quick, convenient charging.
- Output selection with side switch.
- Lockout function avoids accidental activation.
- Anti-skidding pattern to enhance grip and ergonomic feel.
- Magnetic tail for different lighting demands.
- Digitally regulated circuit; max runtime of 100 hours.
- Size: 29.48mm*25.40mm*115.1mm
- Weight: 76 grams (without battery); 126.8 grams (with battery)

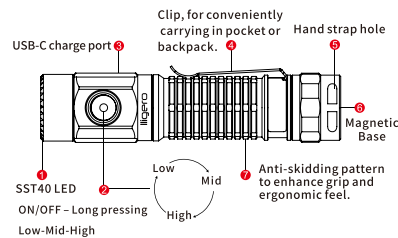

Output & Runtime

FL1 STANDARD	High	Middle	Low	SOS	Strobe
☀️	2200 LUMENS	220 LUMENS	5 LUMENS	800 LUMENS	1700 LUMENS
🕒	6h	12h	100h	/	/
📏	220meters				
⚡	11600cd (Max Intensity)				
🛡️	1 (Impact Resistant)				
🌊	IPX8 (Waterproof)				

Note: Stated data has been measured by using one iligero 3.6V 3500mAh 18650 in the laboratory. The data may vary due to different battery and different environment conditions.
* The High output is measured in total of runtime.

Operating Instruction

ON/OFF

Fully press the side switch to turn on the light, press once again to turn off the light.

Output Selection

With the light turned on, press and hold the side switch to change the brightness mode, cycling by Low - Middle - High.

Special Mode (Strobe/SOS)

Strobe: Double press the side switch to access Strobe, press the switch again to return to the previous status.

SOS: With the strobe mode turned on, double press the side switch to enter SOS mode, press the switch again to return to the previous status.

Memory function

The flashlight has a memory function. It will access the last used output setting when turning the light off and back on again.

Lock/Unlock

Lock: with the light turned off, click the switch 3 times, the flashlight flashes once to indicate locked status.

Unlock: In the lock state, click the switch 3 times, the flashlight flashes once to unlock.

Intelligent Overheat Protection

The flashlight will become hot with extended use. When the light reaches a temperature of 60°C/140°F or above, the light will automatically adjust the brightness level to a lower level to prolong the lifespan of LED.

Recommended batteries

Type	Dimensions	Nominal Voltage	Usability
IG18-35	18650	3.6V	Recommended
Rechargeable Battery (3.6V/2000mAh)	18650	3.6V	Usable

Battery Replacement

Insert the batteries with the positive (+) end pointing forward, otherwise the light doesn't work.

Charging

- Turn off the flashlight, open the dust cap on the flashlight, and plug in the USB Type-C charging cable.
- The indicator light will light up in red when charging, and the green light will stay on when fully charged.
- Once charging is completed, cover the dust cap tightly.

Power Indication

Red: Charging in Progress

Green: Charging Complete

Storage and Maintenance

- Recharge a stored light every four months to maintain optimal battery performance.
- Disassembling the sealed head can cause damage to the lamp and will void the warranty.
- Remove the battery if light will not be used for an extended period.
- Periodic cleaning of the battery contacts improves the lamp's performance as dirty contacts may cause the lamp to flicker, shine intermittently or even fail to illuminate, please check the battery performance as dirty contacts may cause the lamp to flicker, shine intermittently or even fail to illuminate, please check the battery performance first, and clean the contact points with a cotton swab soaked in rubbing alcohol.

IN THE BOX

iligero EC22 flashlight, IG18-35 18650 Li-ion battery, Pouch, Clip, USB-C Charging Cable, Lanyard, Spare O-ring, User manual

Caution

- This flashlight produces extremely bright light which can cause temporary or prolonged blindness. Never shine light into the eyes of non-adversarial parties.
- Lithium batteries can leak, explode, and/or cause injury if improperly handled. Do not disassemble, short, recharge, mix with other battery types, or expose batteries to water, high temperatures, or fire.
- This flashlight may become hot with extended use. Exercise caution when handling to prevent burns.
- Do not operate around flammable materials or in explosive environments.
- Keep away from children.

Warranty

- iligero will replace identical or equal products with documented manufacturing within 7 days of purchase.
- iligero offers a 12 month (1 year) free warranty service from date of purchase. Buyer will be responsible for shipping of the item. Over 12 months, buyer is responsible for incurred parts and shipping costs. iligero will return using a reasonable shipping method.

Unwarrantable

- Damage, disassembly, destruction and unauthorized modifications.
- Damage due to improper storage or battery leakage.

Service

- Contact your retailer or email us at info@iligero.com.



www.iligero.com MADE IN PRC